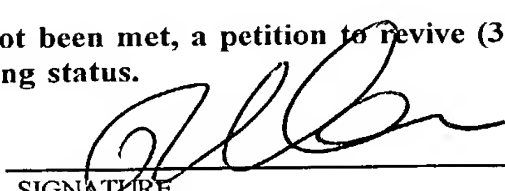


FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		ATTORNEY'S DOCKET NUMBER 2447-016	
INTERNATIONAL APPLICATION NO. PCT/AU00/00838		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/030830	
INTERNATIONAL FILING DATE 12 July 2000 (13.07.2000)		PRIORITY DATE CLAIMED 13 July 1999 (13.07.1999)	
TITLE OF INVENTION MULTIRATE COCHLEAR STIMULATION STRATEGY AND APPARATUS			
APPLICANT(S) FOR DO/EO/US WOLF, Joe; CARTER, Paul Michael; PARKER, Simon Geoffrey; FEARN, Robert; FRAMPTON, Niki			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.			
2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.			
3. <input type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.			
4. <input type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).			
5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))			
a. <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).			
b. <input type="checkbox"/> has been communicated by the International Bureau.			
c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).			
6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).			
a. <input type="checkbox"/> is attached hereto.			
b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).			
7. <input type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))			
a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).			
b. <input type="checkbox"/> have been communicated by the International Bureau.			
c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.			
d. <input type="checkbox"/> have not been made and will not be made.			
8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).			
9. <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).			
10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).			
Items 11 to 20 below concern document(s) or information included:			
11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.			
12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.			
13. <input type="checkbox"/> A FIRST preliminary amendment.			
14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.			
15. <input type="checkbox"/> A substitute specification.			
16. <input type="checkbox"/> A change of power of attorney and/or address letter.			
17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.			
18. <input checked="" type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).			
19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).			
20. <input checked="" type="checkbox"/> Other items or information: Return Receipt Postcard; IPER; Cheque			

531 Rec UPT/ 11 JAN 2002

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 10/030830				INTERNATIONAL APPLICATION NO. PCT/AU00/00838		ATTORNEY'S DOCKET NUMBER 2447-016															
21. <input checked="" type="checkbox"/> The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1040.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =						CALCULATIONS PTO USE ONLY															
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input checked="" type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).						\$ 130.00															
<table border="1" style="width:100%; border-collapse: collapse;"><thead><tr><th style="width: 20%;">CLAIMS</th><th style="width: 20%;">NUMBER FILED</th><th style="width: 20%;">NUMBER EXTRA</th><th style="width: 20%;">RATE</th></tr></thead><tbody><tr><td>Total claims</td><td>18 - 20 =</td><td>0</td><td>x \$18.00</td></tr><tr><td>Independent claims</td><td>3 - 3 =</td><td>0</td><td>x \$84.00</td></tr><tr><td colspan="3"></td><td>+ \$280.00</td></tr></tbody></table>				CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	Total claims	18 - 20 =	0	x \$18.00	Independent claims	3 - 3 =	0	x \$84.00				+ \$280.00	\$ 1170.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE																		
Total claims	18 - 20 =	0	x \$18.00																		
Independent claims	3 - 3 =	0	x \$84.00																		
			+ \$280.00																		
TOTAL OF ABOVE CALCULATIONS =						\$ 1170.00															
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.						\$															
SUBTOTAL =						\$ 1170.00															
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).						\$															
TOTAL NATIONAL FEE =						\$ 1170.00															
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +						\$															
TOTAL FEES ENCLOSED =						\$ 1170.00															
						Amount to be refunded: \$															
						charged: \$															
a. <input checked="" type="checkbox"/> A check in the amount of \$ 1170.00 to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 07-1730 . A duplicate copy of this sheet is enclosed. d. <input type="checkbox"/> Fees are to be charged to a credit card. WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038. NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status. SEND ALL CORRESPONDENCE TO: WEISZ, Tiberiu GOTTLIEB, RACKMAN & REISMAN, P.C. 270 MADISON AVENUE NEW YORK, NEW YORK 10016-0601																					
SIGNATURE  WEISZ, Tiberiu NAME 29,876 REGISTRATION NUMBER																					

MULTIRATE COCHLEAR STIMULATION STRATEGY AND APPARATUS

Technical Field

The present invention relates to cochlear implant prostheses and in particular to an apparatus and method for applying stimulation to the neural structures of a cochlea in order to improve a subject's pitch and speech perception.

Background Art

Cochlear implant systems are used to aid patients having a hearing deficiency. More particularly, these systems include a microphone receiving ambient sounds and converting the sounds into corresponding electrical signals, signal processing means for processing the electrical signals and generating cochlear stimulating signals and an electrode assembly for applying the cochlea stimulating signals to the cochlea of an implantee. In response to these electrical stimulations a perception of corresponding ambient sound is elicited in the implantee.

The inner ear of a normally hearing person includes hair cells which convert the displacement of the ear's basilar membrane in response to sound into nervous impulses. Different parts of the basilar membrane of the normal cochlea are displaced maximally by different frequencies of sound so that low frequency sounds maximally displace apical portions whereas higher frequency sounds cause displacement of more basal portions of the membrane. The nervous system is arranged so that a nervous impulse originating from a hair cell located adjacent an apical area of the membrane is perceived as a low frequency sound whereas a nervous impulse originating from a hair cell located adjacent a more basal position of the membrane is perceived as a higher frequency sound. This mapping of position to pitch is well known in the art as the tonotopic arrangement of the cochlea.

In a dysfunctional ear the hair cells may be damaged or absent so that no nervous impulses are generated. In such cases electrical stimulation impulses must be provided artificially to simulate the nervous activity of the hair cells in order to create a perception of sound.

With reference to figure 1, a typical cochlear implant is shown, which consists of an external component including a speech processor 1, and an

internal component including an implanted receiver and stimulator unit 6 and an intracochlear array 10. The external component further includes a microphone 2 which is shown integral with the speech processor 1. In this illustration the speech processor is arranged so that it can fit behind the ear with the microphone integral therewith. Alternative versions are also envisaged whereby the speech processor is worn on the body and separately attached to the microphone, and also where the speech processor and microphone are implanted in the patient. The present invention is applicable to all these alternatives.

In such cochlear implant devices, ambient sounds are detected by a microphone and a transduced signal is thereby generated, representative of the ambient sound. A processor unit then processes this transduced signal according to one of many strategies, (some of which will be explained further below) and based on this processing stimulation currents are applied between the electrodes of a coupled array. For example, in "monopolar" mode stimulation currents may be caused to flow between an electrode of the electrode array 10 and an extracochlear electrode 115. Nervous discharges elicited in the basilar membrane 8 are conveyed to the central nervous system of the wearer by auditory nerve 9.

In the event that the stimulation current flows between an apical electrode such as electrode 111 and extracochlear electrode 115 then a lower pitched hearing sensation will be perceived by a wearer of the prosthesis than will be the case if stimulation current flows between basal electrode 107 and extracochlear electrode 115 because of the previously mentioned tonotopic arrangement of the cochlea. Further pitch information may be transmitted to the wearer corresponding to the rate at which stimulations are delivered.

Many possibilities exist as to the manner in which the signal processing means operates upon the electrical signals in order to produce stimulation signals. However it has been noted in the past that simultaneous stimulation of electrodes is not generally conducive to eliciting a perception of sound that is faithful to the actual acoustic signals being processed. This is because if electrodes are stimulated simultaneously, current paths between electrodes can interact, causing undesirable stimulation. Consequently most cochlear prosthesis stimulation strategies stimulate by means of only one electrode at a

time.

In the past designers of cochlear implant stimulation strategies have striven to optimise the intelligibility of spoken words as perceived by the wearer of a cochlear implant.

5 One of the earliest sound processing and cochlear stimulation strategies is described in US patent 4,532,930 to the present applicant. In that patent there is taught the use of a filter (F0) dedicated to extracting the voice pitch of a speech signal. The periodicity of the voice pitch is used to set the stimulation periodicity for two or three electrodes. A second, and possibly third, channel is analysed to
10 determine periodicity and amplitude in a selected frequency band.

The periodicity extracted from the second filter, and possibly third filter, is used to select which electrode is stimulated for the second and third channels while the periodicity of stimulation of the channel is determined by the periodicity of the output signal from the F0 filter.

15 Another stimulation arrangement is described in US 4,207,441. In that system there are n electrodes each coupled to one of n filters. Each electrode is stimulated once per analysis period, with an intensity corresponding to the amplitude of the corresponding filter channel. The analysis period of this system is predetermined and hence is not related to the signal on the filter outputs.

20 More recently in EP 0 745 363 there is described a stimulation system which takes into account the temporal behaviour of the cochlea. In an embodiment of the invention therein described a wavelet transformation is used to extract the temporal information with a view to using this information to determine the sequence of stimulation of the electrodes. The purpose of the
25 invention is to improve the temporal resolution in response to a rapidly changing audio spectrum.

A problem that has been faced by users of cochlear implants featuring prior art stimulation schemes is that while intelligibility of spoken words is often good the user's pitch perception, and in particular perception of music, is poor.
30 Accordingly, it is an object of the present invention to provide an apparatus and method for use in a multi-channel cochlear implant which will improve a user's perception of pitch.

Summary of the Invention

Broadly, the present invention seeks to use information about the periodicity of the signal in each filter channel as a factor in determining the rate of stimulation applied to a tonotopically placed electrode which corresponds to the relevant channel. This allows for an improved perception of pitch by the implant user. As a result, the rate of stimulation which occurs in practice for each electrode will be related to the periodicity of the signal in the filter channel corresponding to that electrode.

According to one aspect of the present invention there is provided a cochlear implant prosthesis of the type having a transducer for converting an acoustic signal to an electrical signal, a plurality of bandpass filtering means responsive to said electrical signal and operatively producing a plurality of bandpass filtered signals, signal processing means responsive to said plurality of bandpass filtered signals and operatively generating stimulation commands, electrode driving means responsive to said stimulation commands and an electrode array coupled to said electrode driving means for operatively delivering to a user of said cochlear implant prosthesis stimulations in accordance with said stimulation commands, said signal processing means including:

- a) period estimation means, responsive to said filtered signals and operatively generating periodicity signals indicative of the periodicity of each of at least a number of said plurality of filtered signals;
- b) amplitude estimation means responsive to said filtered signals and operatively generating magnitude signals indicative of the magnitude of each of said plurality of filtered signals;
- c) selection means responsive to said magnitude signals arranged to select only one filtered signal of said plurality of filtered signals in each stimulation period, said selection means generating said stimulation commands including a command to stimulate by means of an electrode operatively tonotopically best corresponding to said one filtered signal, said command to stimulate further specifying a time for stimulation to occur dependent on a corresponding one of said periodicity signals.

According to another aspect, the present invention provides a processing device for a cochlear implant prosthesis, said prosthesis being of the type

including electrode driving means responsive to stimulation commands and an electrode array coupled to said electrode driving means for operatively delivering to a user of said cochlear implant prosthesis stimulations in accordance with said stimulation commands,

5 said processing device being responsive to a transducer for converting an acoustic signal to an electrical signal and including a plurality of bandpass filtering means responsive to said electrical signal and operatively producing a plurality of bandpass filtered signals, signal processing means responsive to said plurality of bandpass filtered signals and operatively generating stimulation commands, said
10 signal processing means including:

 a) period estimation means, responsive to said filtered signals and operatively generating periodicity signals indicative of the periodicity of each of at least a number of said plurality of filtered signals;

 b) amplitude estimation means responsive to said bandpass filters
15 operatively generating magnitude signals indicative of the magnitude of each of said plurality of filtered signals;

 c) selection means responsive to said magnitude signals arranged to select only one filtered signal of said plurality of filtered signals in each stimulation period, said selection means generating said stimulation commands including a
20 command to stimulate by means of an electrode operatively tonotopically best corresponding to said filtered signal, said command to stimulate further specifying a time for stimulation to occur dependent on a corresponding one of said periodicity signals.

 According to a further aspect of the present invention there is provided a
25 method of operating a cochlear implant prosthesis of the type including a plurality of bandpass filters each having a characteristic centre frequency, said filters generating a corresponding plurality of filtered signals, said prosthesis further including stimulation delivery means coupled to an electrode array, said method including the steps of :

30 a) in each of a number of time intervals, determining the amplitude for each of said plurality of filtered signals and a periodicity value for at least some of said plurality of filtered signals;

b) selecting only one of said signals as a basis for stimulation in each stimulation period; and

c) applying a stimulation current by means of an electrode of said electrode array tonotopically closest to the centre frequency of the bandpass filter producing the signal determined in step b), said stimulation current being applied during a time interval determined from the periodicity value of the signal determined in step b).

Brief Description of the Drawings

Figure 1 depicts a typical cochlear implant device.

10 Figure 1A depicts a block diagram of the functional elements of a cochlear implant according to the present invention.

Figure 2 depicts a dedicated hardware version of a cochlear implant prosthesis according to the present invention.

15 Figure 3A is a graph of a possible output of an amplitude estimator module of Figure 2.

Figure 3B is a graph of a possible output of a period estimator module of Figure 2 of the same channel as the amplitude estimator of Figure 3A.

Figure 3C is a graph of stimulation currents generated via an electrode in accordance with the amplitude and period estimates of Figures 3A and 3B.

20 Figure 3D is a graph of stimulation currents generated via a further electrode having a stimulation current occurring simultaneously with a stimulation current in the graph of Figure 3C.

Figure 3E is a graph of a single stimulation current.

25 Figure 4 is a flowchart of procedural steps used in implementing the present invention by means of software on an apparatus of the type depicted in Figure 1A.

Figure 5 is a flowchart of procedural sub-steps involved in one of the boxes appearing in Figure 3.

Detailed Description

30 The present invention will be described with reference to a specific implementation. However, it will be appreciated that the present invention can be implemented in various ways, with suitable modifications to suit the cochlear implant system in question.

30 Referring to Figured 2 it will be noted that the analog signal from pre-conditioning module 13 is first sampled at 16 kHz by sampler 31 thereby producing a sampled signal. The sampled signal is split 22 ways, each of the split signals providing an input to digital filters 35A-35V which filter the signal into

quarter octave frequency bands. It will be appreciated that the numbers of ways the signal is split, and the sampling rate, are matters of design choice appropriate to the system in which the present invention is implemented.

Digital filters 35A-35V are bandpass and logarithmically spaced with the base frequency being typically at 150 Hz. Each filter is of a 6th order Chebychev Type I bandpass type implemented in three second order sections. The quarter octave frequency bands are as shown below:

Filter Band	Lower Frequency Boundary (Hz)	Upper Frequency Boundary (Hz)
A	150.00	178.38
B	178.38	212.13
C	212.13	252.27
D	252.27	300.00
E	300.00	356.76
F	356.76	424.26
G	424.26	504.54
H	504.54	600.00
I	600.00	713.52
J	713.52	848.53
K	848.53	1009.10
L	1009.10	1200.00
M	1200.00	1427.00
N	1427.00	1697.10
O	1697.10	2018.20
P	2018.20	2400.00
Q	2400.00	2854.10
R	2854.10	3394.10
S	3394.10	4036.30
T	4036.30	4800.00
U	4800.00	5708.20
V	5708.20	6788.20

The bandpass filtered signal from each of the digital filters, for example 35A, is connected to an amplitude detection module 37A and a period estimation module 39A. The output AMP[A] of amplitude detection module 37A is a digital signal representing an estimation of the amplitude of the sampled signal from filter 35A. The construction of module 37A is straightforward, well understood by those skilled in the art, and will not be explained in detail other than to say that it could be based on a series of comparators.

Period estimation module 39A counts sampling periods between positive zero crossings of the signal from filter 35A. The output signal PERIOD[A] is scaled so that it is expressed in units of "timeslices".

One "timeslice" is the time taken to deliver one stimulation pulse by means of an electrode. With reference to Figure 3E an example of a stimulation current pulse waveform comprises a first 'phase' 103 being a square wave of predetermined amplitude, an interphase gap 105 and a second phase 107 being

a current square wave of the same magnitude and duration as the first phase but flowing in the opposite direction between an intra-cochlear electrode and (in mono-polar mode) an extra-cochlear electrode. Time periods 109 and 111 are present in which the system generating the stimulations has time to perform any
5 necessary operations in order to configure for the next stimulation. The overall time taken to set-up, deliver and recover from application of a stimulation is one timeslice, in the present example a timeslice is of approximately 69 microseconds duration.

In the present implementation the preferred maximum stimulation rate is
10 8kHz whereas the preferred sampling rate is 16kHz. Accordingly PERIOD[A] is the number of samples occurring between positive-going zero crossings divided by two and rounded. The PERIOD[A] signal is updated at the end of each period.

The AMP[A],...,AMP[V] and PERIOD[A],...,PERIOD[V] signals contain magnitude and period information concerning the ambient sound picked up by
15 microphone 11 for each of the frequency bands monitored by bandpass filters 35. It is possible to simply stimulate via each corresponding electrode $e[i]$ with a current intensity corresponding to AMP[i] at a time PERIOD[i] into the future in order to convey the information generated by amplitude detectors 37 and period estimators 39 to a wearer of the cochlear prosthesis. For example, with reference
20 to Figures 3A, 3B and 3C a stimulation sequence via electrode $e[A]$ is shown corresponding to amplitude and period values generated by amplitude detection module 37A and period estimation module 39A as shown plotted in Figures 3A and 3B. Period[A] is equal to P1 at time $t=0$ and Amp[A] is equal to a_1 . Accordingly at a time $t=P_1$ a stimulation current is delivered via electrode $e[A]$ of
25 electrical amplitude $I(a_1)$ where $I()$ is a loudness growth function which maps amplitude into the dynamic range of the wearer of the prosthesis.

The period P2 and amplitude a_2 values are then obtained and a further stimulation is delivered at time $t=P_1+P_2$ of amplitude $I(a_2)$. This process is repeated continuously to produce the stimulation sequence of biphasic current
30 pulses shown in the graph of Figure 3C. As previously mentioned, such a process could be simultaneously performed independently on all channels of the implant, (a "channel" as used here refers to a stimulation electrode, its

corresponding filter and period and amplitude estimation modules).

In the system thus far described the period estimation module 39A produces a period estimate which is simply the time delay between the last two positive-going zero crossings. While this system works well, any noise on the 5 individual period estimates will degrade the performance of the system. To prevent this, it is desirable to calculate a smoothed period estimate.

The individual period estimates constitute a number sequence which is amenable to any of the methods of smoothing known to the art of digital signal processing. The smoothing may, for example, be implemented as a simple FIR 10 or recursive digital filter - preferably a low-pass filter. Alternatively a rank-order filter, such as a median filter may be used. A rank-order filter has the advantage that it will completely remove any single data errors from the number sequence. A smoothed period estimate is thus produced by applying the sequence of period estimates to a digital filter, and taking the output of that filter. The smoothed 15 period estimate is then utilised by taking the most recent output from the filter and using it in place of the (unsmoothed) period estimate.

With reference to Figure 3D there is shown a stimulation sequence via electrode e[B]. It will be noted that stimulation pulse 102 occurs at exactly the same time as stimulation pulse 1(a2) of Figure 3C. Such coincidences occur more 20 and more frequently depending on the number of channels used.

There are at least two problems associated with the above stimulation strategy by which stimulations may be delivered by two or more electrodes simultaneously. Firstly, as discussed above, it is well known that simultaneous, or very near simultaneous, stimulation produces a deterioration in the quality of the 25 sound perceived by the user, due to the interaction of simultaneous current paths between the electrodes.

Consequently the application of stimulations on a number of channels simultaneously is undesirable. A further problem is that simultaneous stimulation requires very substantial processing power and so is not possible in the majority 30 of cochlear implants presently available.

In light of the above problems the inventors have incorporated a preferred refinement for determining which information signals, coming from amplitude

detectors 37 and period estimation modules 39 are most appropriate for acting upon in order to produce a high quality percept in a user. According to the invention, for any stimulation period i.e. "timeslice" t_0 the signals $AMP[A,t_0], \dots, AMP[V,t_0]$ are ordered according to magnitude and a stimulation
5 current is generated by means of the electrode which corresponds to the signal $AMP[A,t_0], \dots, AMP[V,t_0]$ having the greatest magnitude. (It should be noted that, when implanted, electrodes $e[A], \dots, e[V]$ are tonotopically mapped to filters f_A, \dots, f_V so that electrode $e[A]$ is most apically placed whereas electrode $e[v]$ is most basally placed.) For example, if it is found that $AMP[F,t_0]$ has the greatest
10 magnitude at a given timeslice then electrode $e[F]$ is used to deliver the monopolar stimulation in the next timeslice t_1 .

A further variation to this scheme is that a number of the next largest magnitude signals are also determined in the same timeslot, for example $AMP[G,t_0] > AMP[B,t_0] > AMP[K,t_0]$ might be determined to have the magnitudes
15 next greatest to $AMP[F,t_0]$. In that case those values are assigned to $AMP[G,t_1]$, $AMP[B,t_1]$ and $AMP[K,t_1]$ respectively. During the next timeslice, t_1 , the procedure is repeated and it may be that $AMP[G,t_1]$ is selected as having the greatest magnitude so that electrode $e[G]$ is selected for delivering a stimulation pulse of amplitude corresponding to $AMP[G,t_1] = AMP[G,t_0]$. By using this scheme
20 it is possible that signals having a large magnitude, though not the greatest, are presented to the user after a short time delay. The inventors have found that most acoustic power is centred around the lower frequency bands which have longer periods associated with them whereas the higher frequency bands generally have less power associated with them as well as being of shorter
25 period. Accordingly, it is predominantly higher frequency sounds which are delayed rather than lower frequency sounds.

A further refinement is that rather than calculate period estimates in respect of the outputs from filters centred at higher frequencies, for example for filters F_1, \dots, F_V period estimators $39I, \dots, 39V$ simply generate a constant signal, or
30 periodicity value, indicating a period of 1.25ms i.e. a periodicity value towards the highest stimulation rate that the device is capable of supporting.

While the preceding description covers a system utilising period estimators on some or all of the bandpass filtered signals, it is possible to implement the system more simply. A stimulus could be requested each time a positive zero-crossing is detected on a filter output. Once per timeslice each channel is
5 interrogated to see if it has a stimulation request pending. If there are no requests pending, then no action is required. If there is exactly one request pending, then a stimulus is generated corresponding to that request.

If more than one request is pending, then the following actions are taken. The requests are sorted according to the amplitudes of the corresponding
10 bandpass filtered signals. A stimulus is generated corresponding to the bandpass filtered signal with the largest amplitude. The next N largest (preferably 5 largest) amplitude requests are delayed by one timeslice. Any remaining requests are cancelled.

This system is simpler to implement than that previously described. It has
15 two main disadvantages, however. The previously described system utilising period estimates acts to limit the stimulation rate on higher frequency channels. This is directly beneficial in that excessive stimulation with little information content is avoided. More importantly, in the case of relatively large amplitude high frequency signals, the lower frequency signals will be completely lost in the
20 simpler system. The rate-limiting effect of the period-estimation system will mean that the low-frequency signal will always get through.

The request generators 41-A,...,41-V and request arbitrator 43 operate to determine which electrode will be stimulated from the AMP[A],...,AMP[V] and PERIOD[A],...,PERIOD[V] signals. The operation of the request generators and
25 the request arbitrator, in order to implement the aforescribed scheme, will now be explained with exemplary reference to request generator 41A.

The AMP[A] and PERIOD[A] signals are inputs to request generator module 41A. Another input to the request generator is the CLK signal which corresponds to the present timeslice. The CLK signal is modulus 256 to avoid
30 overflow problems. The last input to request generator 41A is a command signal ARB_CMD[A] from request arbitrator 43.

The outputs from request generator 41A are TSLICE[A] and REQ_AMP[A].

The TSLICE[A] represents the time at which it is proposed by generator 41A that a stimulation be delivered having an amplitude value represented by REQ_AMP[A].

The relationship between TSLICE[A] and PERIOD[A] and REQ_AMP[A] and AMP[A] is determined by the value of the ARB_CMD[A] signal. The ARB_CMD[A] signal can take one of three values REQUEST, DELAY, DISCARD. When ARB_CMD[A] takes the value :

```

    REQUEST
        then REQ_AMP[A] := AMP[A]; TSLICE[A] :=CLK+PERIOD[A]
10    DELAY
        then TSLICE[A] := TSLICE[A] + 1
    DISCARD
        take no action.
```

The principle behind these rules is that in the event that request arbitrator 43, whose operation will shortly be described, determines that a stimulation pulse should be applied corresponding to the output from filter 35A then by sending an ARB_CMD[A] signal having the value REQUEST to request generator 41A the amplitude and timing of the stimulation pulse is made available at the next timeslice. Alternatively, if ARB_CMD[A] takes the value DELAY then the corresponding TSLICE[A] variable is incremented. Construction of the request generator, in order to implement the above rules is readily accomplished according to established synchronous digital design techniques.

Request arbitrator module 43 takes as its input the signals TSLICE[A],..., TSLICE[V] from each of the request generators 41A-41V, REQ_AMP[A],..., REQ_AMP[V] and the CLK signal. Arbitrator module 43 generates a signal P_CHAN which identifies which of electrodes e[A],...,e[V] of the electrode array is to be used to apply a stimulation.

The arbitrator module also generates a signal P_AMP which takes a value REQ_AMP[A],...,REQ_AMP[V] which is used, after scaling as will subsequently be described, to determine the amplitude of the signal to be used when applying stimulation. Request arbitrator module 43 operates according to the following rules:

1. Find all TSLICE[i] with a value equal to CLK.
2. Find N channels of those determined in Step 1 which have the largest value of REQ_AMP[j]. The channel with the largest value of REQ_AMP[j] and TSLICE[j] as determined in step 1 is found and P_CHAN set to j and P_AMP set to REQ_AMP[j]. So that a stimulation is directed via electrode e[j] with amplitude scaled from the value P_AMP=REQ_AMP[j]. This is accomplished by setting the ARB_CMD[j] signal to REQUEST.
3. The channels having the next N-1 largest amplitude values REQ_AMP[] are delayed by one timeslice for consideration during set up for the next stimulation. This is achieved by sending an ARB_CMD[] signal to the corresponding N-1 request generators to DELAY.
4. The remaining channels, which were selected in step 1 but not in step 2 are discarded. This is achieved by sending the corresponding request generators an ARB_CMD[] signal of value DISCARD.
5. If any of the request generators is sending a specific "no pulse request" then the corresponding ARB_CMD[] signals are set to REQUEST.

Once the P_CHAN and P_AMP values have been determined they are passed to Loudness growth function module 47. The growth function module takes into account the predetermined comfort and threshold levels of the user of the cochlear prosthesis in order to map the P_AMP values into the listeners dynamic range. Such mapping is known in the prior art and the reader is referred to US Patent No. 4,532,930 to the same applicant for further details.

The invention is most conveniently practised, in accordance with the embodiment of Figure 1, by programming a SPrint speech processor, available from Cochlear Limited of 14 Mars Road, Lane Cove, NSW 2066, Australia, in order to perform the operations described in relation to Figure 2. The SPrint speech processor is used in conjunction with a CI24M cochlear implant receiver-stimulator from the same vendor.

With reference to Figure 4 there is depicted a block diagram of the overall operational procedure for implementing the present invention in software. At block 201, for each sample period, the sound signal is filtered into the required number of channels. At block 202, the signal in each channel is analysed to determine its

Claims

1. A cochlear implant prosthesis of the type having a transducer for converting an acoustic signal to an electrical signal, a plurality of bandpass filtering means responsive to said electrical signal and operatively producing a plurality of bandpass filtered signals, signal processing means responsive to said plurality of bandpass filtered signals and operatively generating stimulation commands, electrode driving means responsive to said stimulation commands and an electrode array coupled to said electrode driving means for operatively delivering to a user of said cochlear implant prosthesis stimulations in accordance with said stimulation commands, said signal processing means including:

a) period estimation means, responsive to said filtered signals and operatively generating periodicity signals indicative of the periodicity of each of at least a number of said plurality of filtered signals;

b) amplitude estimation means responsive to said filtered signals and operatively generating magnitude signals indicative of the magnitude of each of said plurality of filtered signals;

c) selection means responsive to said magnitude signals arranged to select only one filtered signal of said plurality of filtered signals in each stimulation period, said selection means generating said stimulation commands including a command to stimulate by means of an electrode operatively best corresponding to said one filtered signal, said command to stimulate further specifying a time for stimulation to occur dependent on a corresponding one of said periodicity signals.

2. A cochlear implant prosthesis according to claim 1, wherein said period estimation means operatively determines a value for the time between successive zero crossings by the filtered signal, and responsive to this value generates said periodicity signal.

3. A cochlear implant according to claim 2, wherein said period estimation means is further responsive to previous values of said time between successive zero crossings, so that a smoothed period estimate value is generated, and responsive to this value said period estimation means generates said periodicity signal.

4. A cochlear implant according to claim 3, wherein said periodicity signal is scaled to an integral multiple of the time taken to deliver one stimulation pulse.

5. A cochlear implant according to claim 1, wherein said selection means is responsive to the amplitude and selects said one filtered signal on the basis that said signal has the greatest amplitude.

6. A cochlear implant according to claim 1, wherein the rates of stimulation operatively delivered to each electrode differ from each other in response to said periodicity signals.

7. A processing device for a cochlear implant prosthesis, said prosthesis being of the type including electrode driving means responsive to stimulation commands and an electrode array coupled to said electrode driving means for operatively delivering to a user of said cochlear implant prosthesis stimulations in accordance with said stimulation commands,

said processing device being responsive to a transducer for converting an acoustic signal to an electrical signal and including a plurality of bandpass filtering means responsive to said electrical signal and operatively producing a plurality of bandpass filtered signals, signal processing means responsive to said plurality of bandpass filtered signals and operatively generating stimulation commands, said signal processing means including:

a) period estimation means, responsive to said filtered signals and operatively generating periodicity signals indicative of the periodicity of each of at least a number of said plurality of filtered signals;

b) amplitude estimation means responsive to said bandpass filters operatively generating magnitude signals indicative of the magnitude of each of said plurality of filtered signals;

c) selection means responsive to said magnitude signals arranged to select only one filtered signal of said plurality of filtered signals in each stimulation period, said selection means generating said stimulation commands including a command to stimulate by means of an electrode operatively best corresponding to said filtered signal, said command to stimulate further specifying a time for stimulation to occur dependent on a corresponding one of said periodicity signals.

8. A processing device according to claim 7, wherein said period estimation means operatively determines a value for the time between successive zero crossings by said filtered signal, and responsive to this value generates said periodicity signal.

9. A processing device according to claim 8, wherein said period estimation means is further responsive to previous values of said time between successive zero crossings, so that a smoothed period estimate value is generated, and responsive to this value said period estimation means generates said periodicity signal.

10. A processing device according to claim 9, wherein said periodicity signal is scaled to an integral multiple of the time taken to deliver one stimulation pulse.

11. A processing device according to claim 7, wherein said selection means is responsive to the amplitude and selects said one filtered signal on the basis that said signal has the greatest amplitude.

12. A processing device according to claim 7, wherein the stimulation commands are such that the rates of stimulation operatively delivered to each electrode differ from each other in response to said periodicity signals.

13. A method of operating a cochlear implant prosthesis of the type including a plurality of bandpass filters each having a characteristic centre frequency, said filters generating a corresponding plurality of filtered signals, said prosthesis further including stimulation delivery means coupled to an electrode array, said method including the steps of :

- a) in each of a number of time intervals, determining the amplitude for each of said plurality of filtered signals and a periodicity value for at least some of said plurality of filtered signals;
- b) selecting only one of said signals as a basis for stimulation in each stimulation period; and
- c) applying a stimulation current by means of an electrode of said electrode array tonotopically closest to the centre frequency of the bandpass filter producing the signal determined in step b), said stimulation current being applied during a time interval determined from the periodicity value of the signal determined in step b).

14. A method according to claim 13, wherein said periodicity value is determined by acquiring a period value for the time between successive zero crossings by the filtered signal, and responsive to the period value generating said periodicity signal.

15. A method according to claim 14, wherein said periodicity value is determined using a smoothed period value, said smoothed value being determined in response to current and previous values of said period value, and responsive to said smoothed period value said periodicity signal is generated.

16. A method according to claim 15, wherein said periodicity value is determined for all of said filtered signals.

17. A method according to claim 16, wherein step (b) includes determining which of said plurality of signals has the greatest amplitude.

18. A method according to claim 13, wherein the rates of stimulation operatively delivered to each electrode differ from each other in response to said periodicity signals.

CORRECTED VERSION

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
18 January 2001 (18.01.2001)

PCT

(10) International Publication Number
WO 01/03622 A1

(51) International Patent Classification⁷: A61F 11/04,
H04R 25/00

(21) International Application Number: PCT/AU00/00838

(22) International Filing Date: 13 July 2000 (13.07.2000)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PQ 1610 13 July 1999 (13.07.1999) AU

(71) Applicant (for all designated States except US):
COCHLEAR LIMITED [AU/AU]; 14 Mars Road,
Lane Cove, NSW 2066 (AU).

(72) Inventors; and

(75) Inventors/Applicants (for US only): WOLF, Joe

[AU/AU]; 6/142 Beach Street, Coogee, NSW 2034 (AU).
CARTER, Paul, Michael [GB/US]; 16788 East Prentice
Circle, Aurora, CO 80015 (US). PARKER, Simon,
Geoffrey [AU/AU]; 8/3 Devlin Street, Ryde, NSW 2112
(AU). FEARN, Robert [GB/AU]; 5/170 Marine Pa-
rade, Maroubra, NSW 2035 (AU). FRAMPTON, Niki
[GB/AU]; 6/13 Pickford Avenue,, Eastwood. N.S.W.,
2122, Australia.

(74) Agent: WATERMARK PATENT & TRADEMARK
ATTORNEYS; Unit 1, The Village, Riverside Corporate
Park, 39-117 Delhi Road, North Ryde, NSW 2113 (AU).

(81) Designated States (national): AU, CA, CN, JP, US.


(84) Designated States (regional): European patent (AT, BE,
CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC,
NL, PT, SE).

Published:

— With international search report.

[Continued on next page]

(54) Title: MULTIRATE COCHLEAR STIMULATION STRATEGY AND APPARATUS

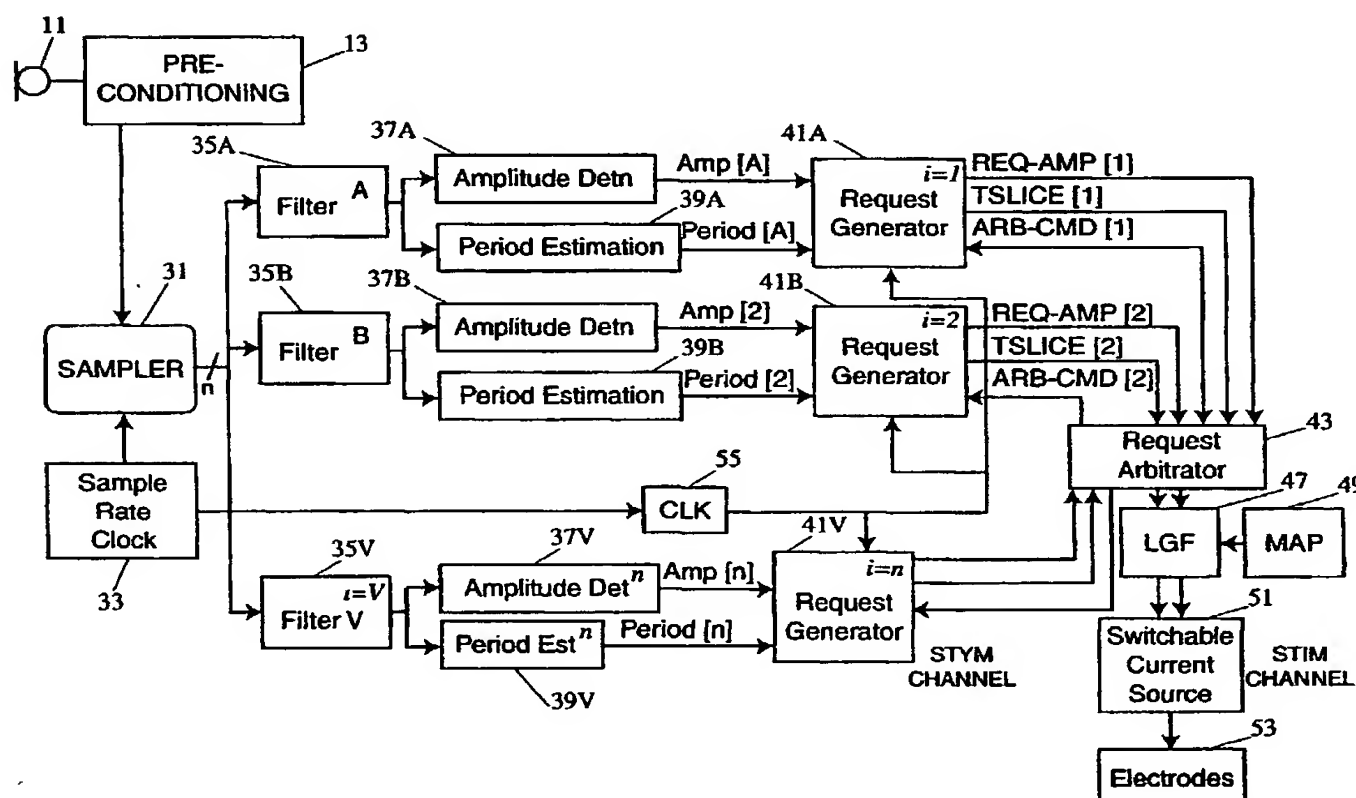

(57) Abstract: An improved processing approach is disclosed in order to allow for different rates of stimulation to be used for different electrodes in a multi-electrode cochlear implant. When the incoming signal is processed by filter array (35), each channel is processed to determine amplitude (37) and to estimate the period of the signal in that channel (39). The amplitude and period information is used to determine which electrode is stimulated, and the timing of that stimulation.

WO 01/03622 A1



(48) Date of publication of this corrected version:


28 June 2001

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(15) Information about Correction:

see PCT Gazette No. 26/2001 of 28 June 2001, Section II

Fig 1.

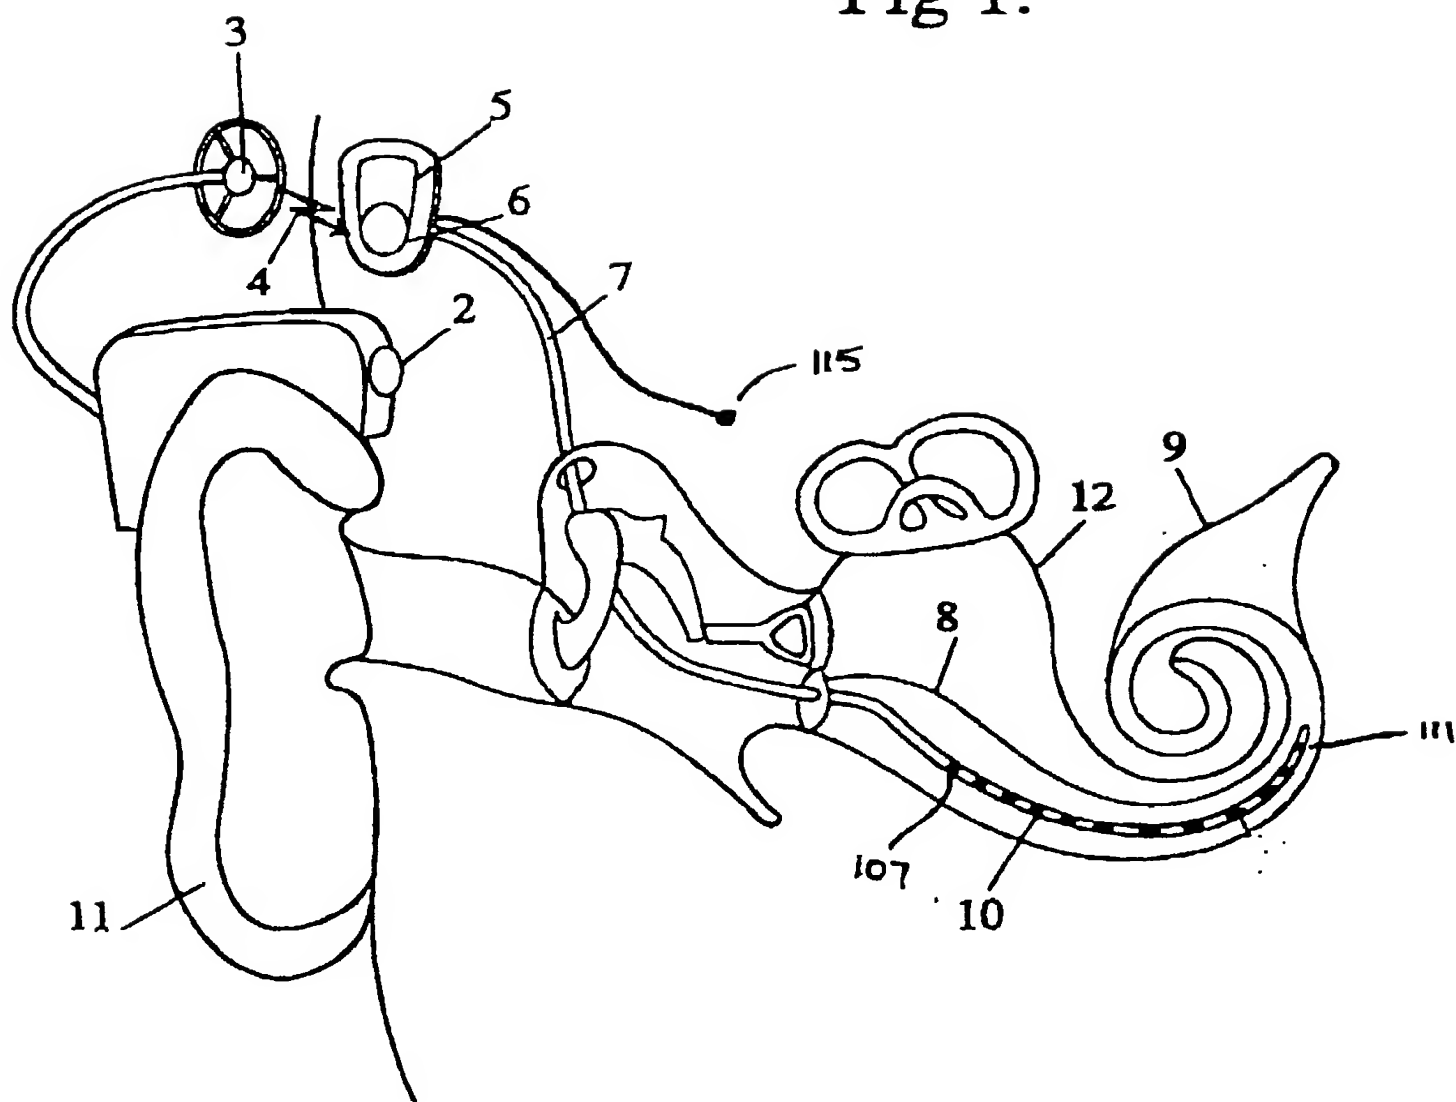

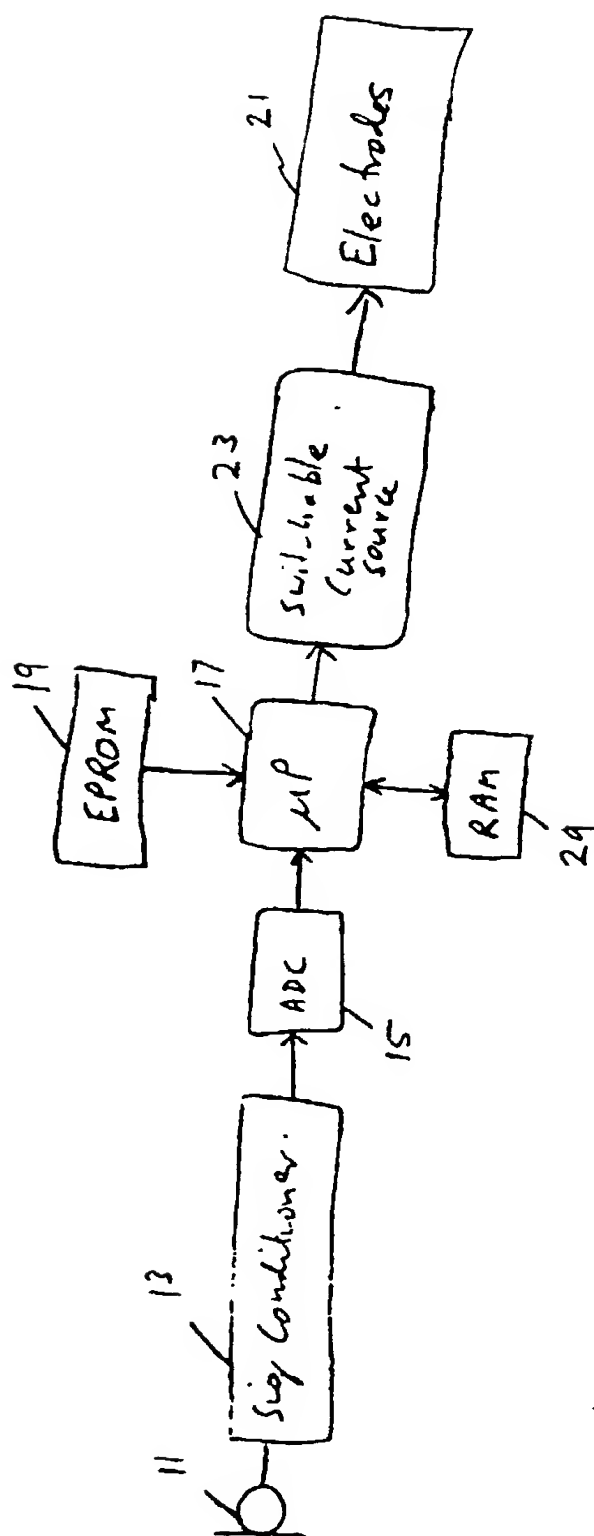


Fig 1A








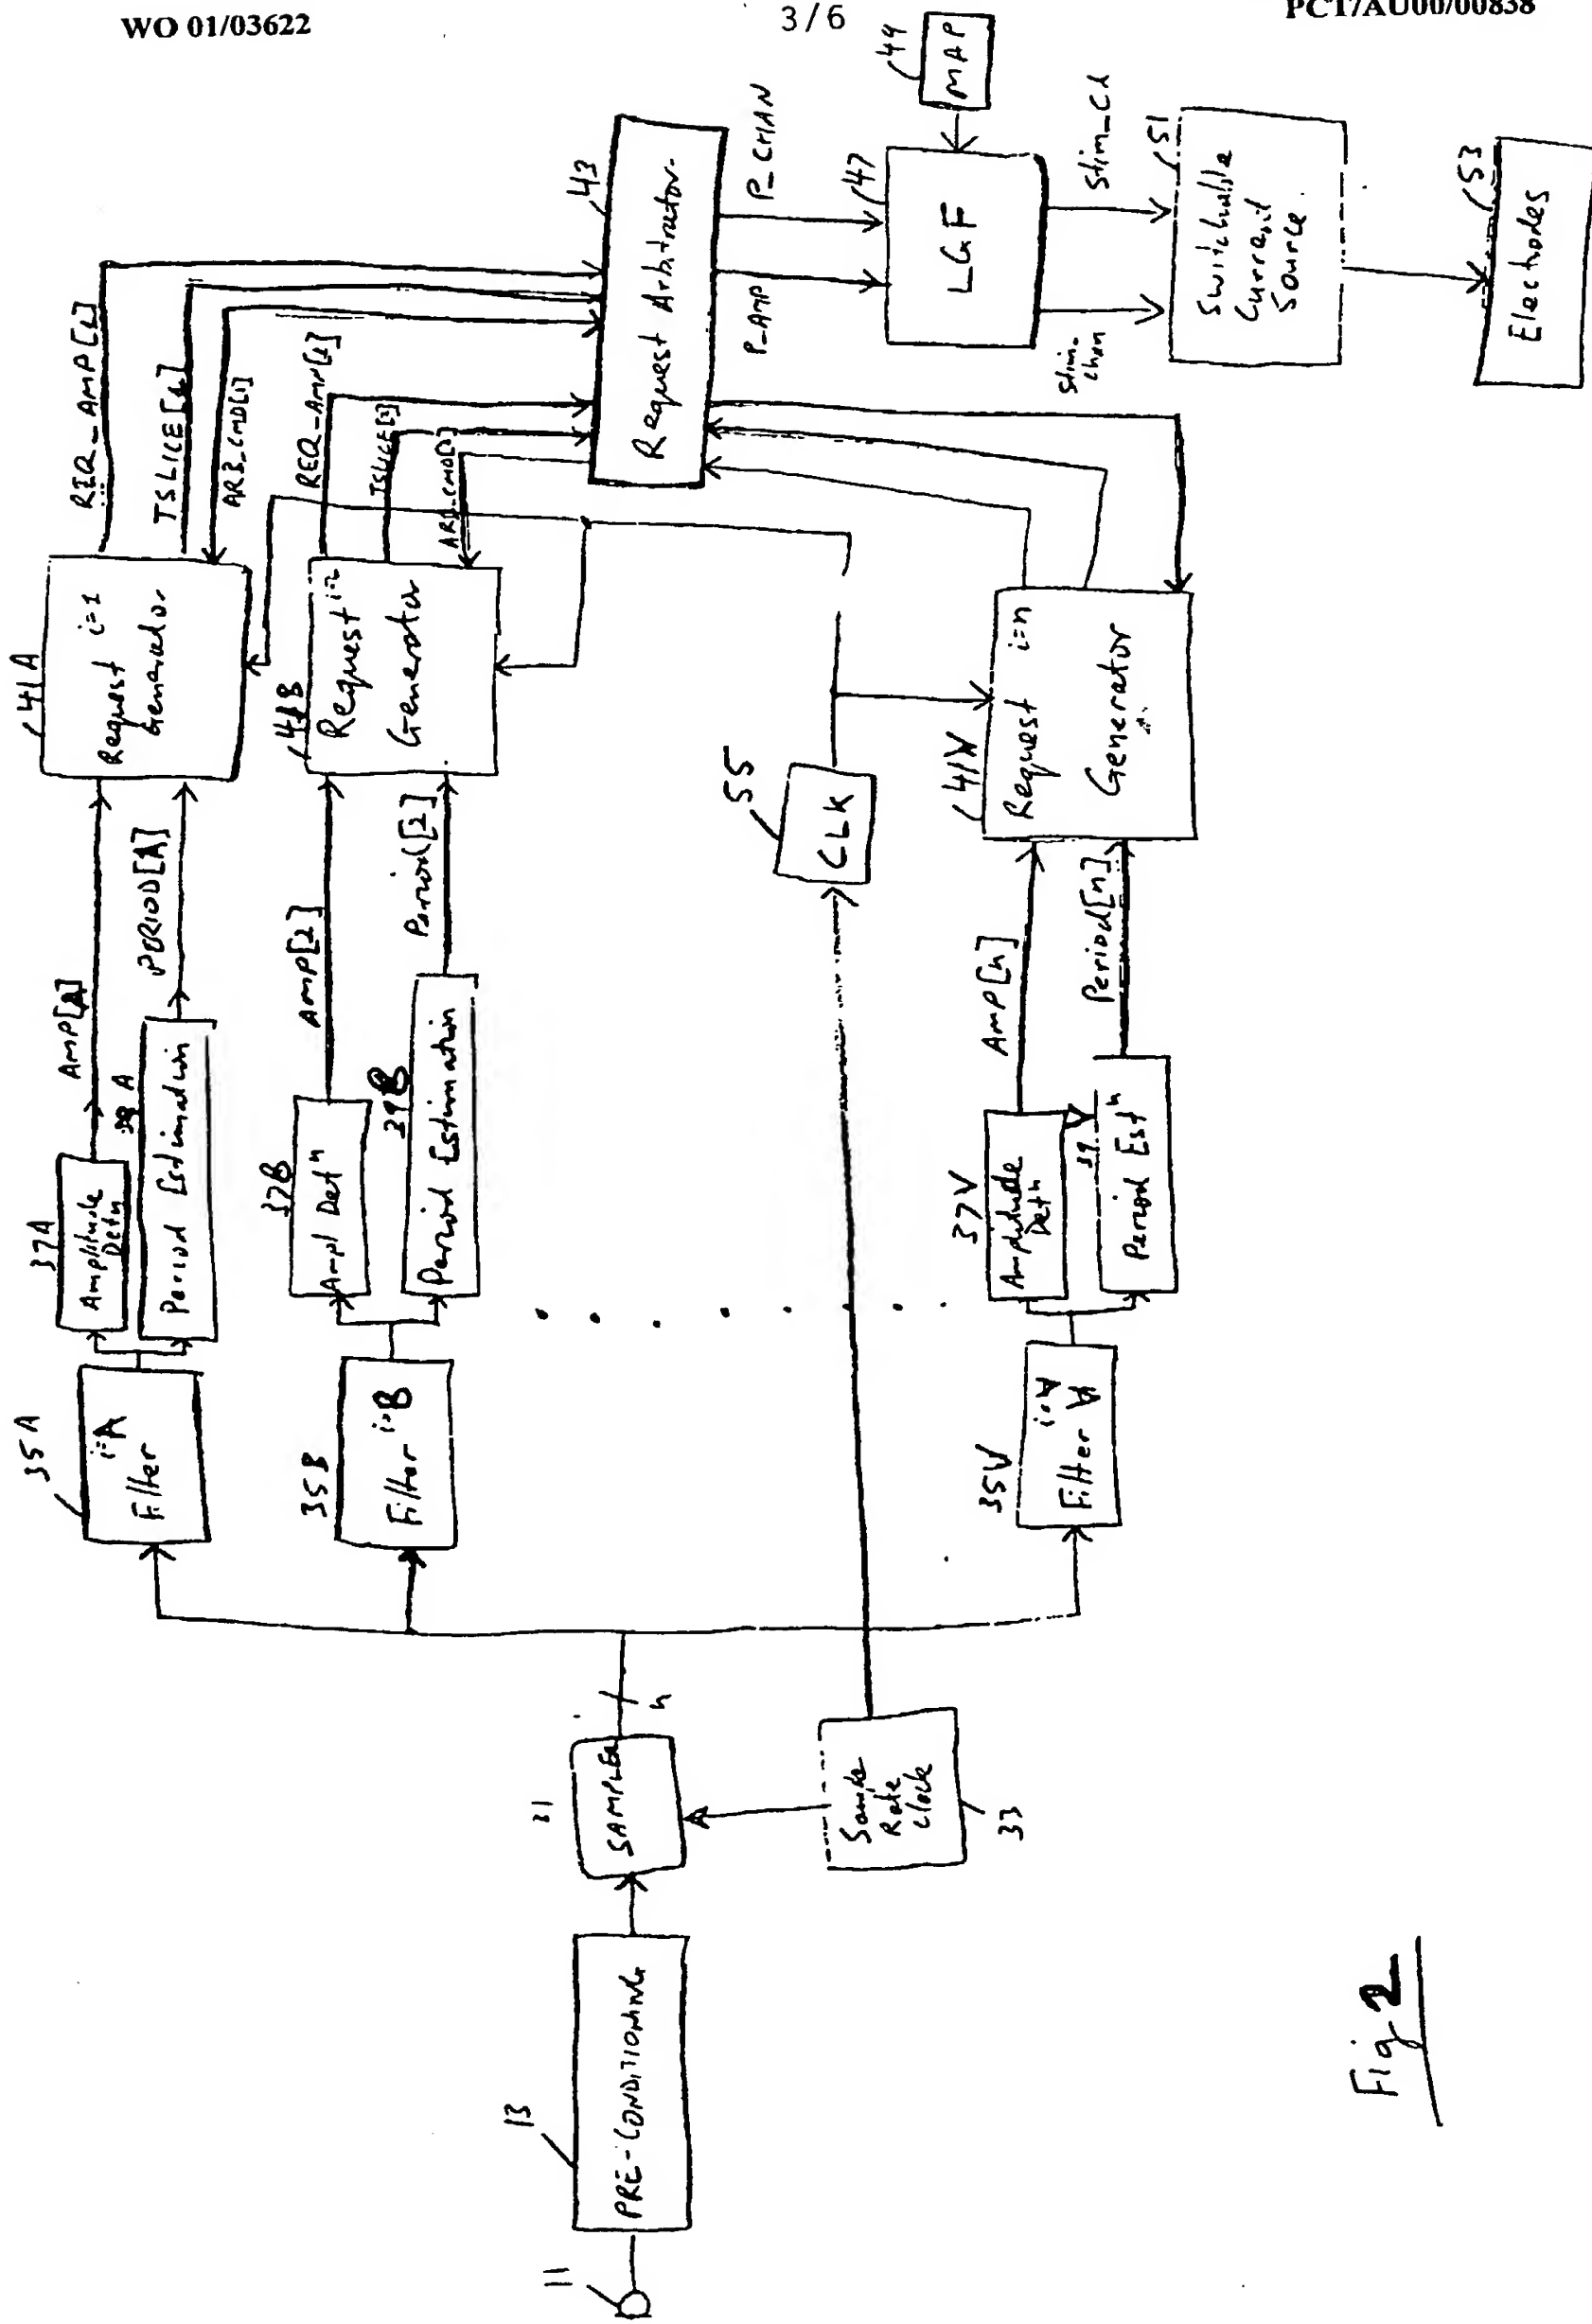


Fig 2



Fig 4

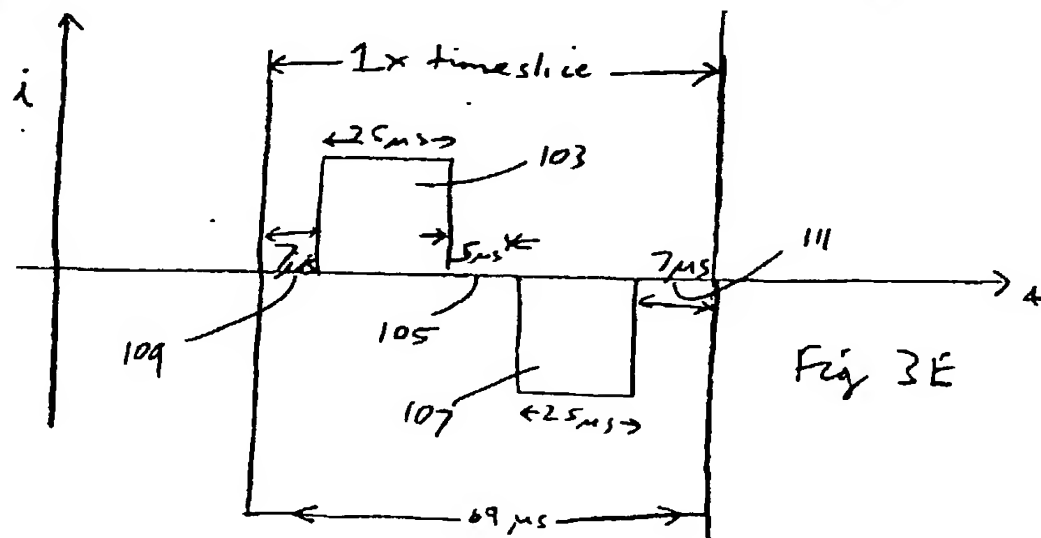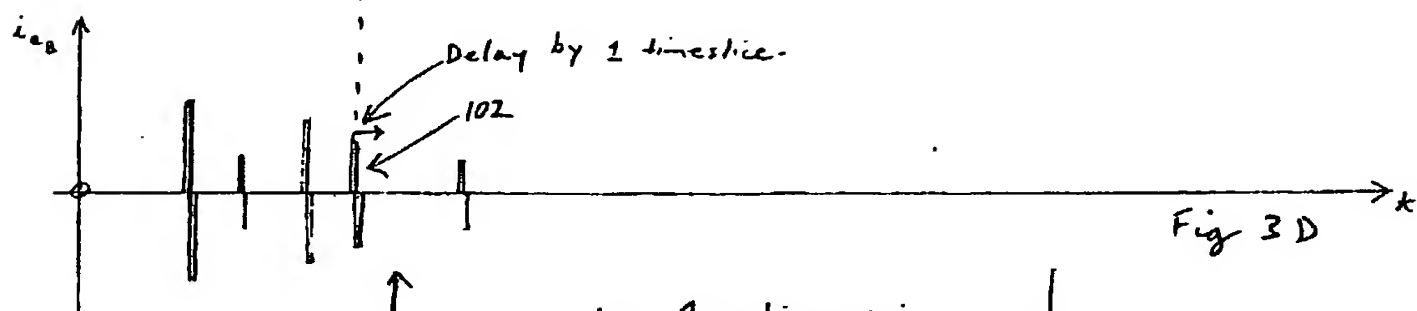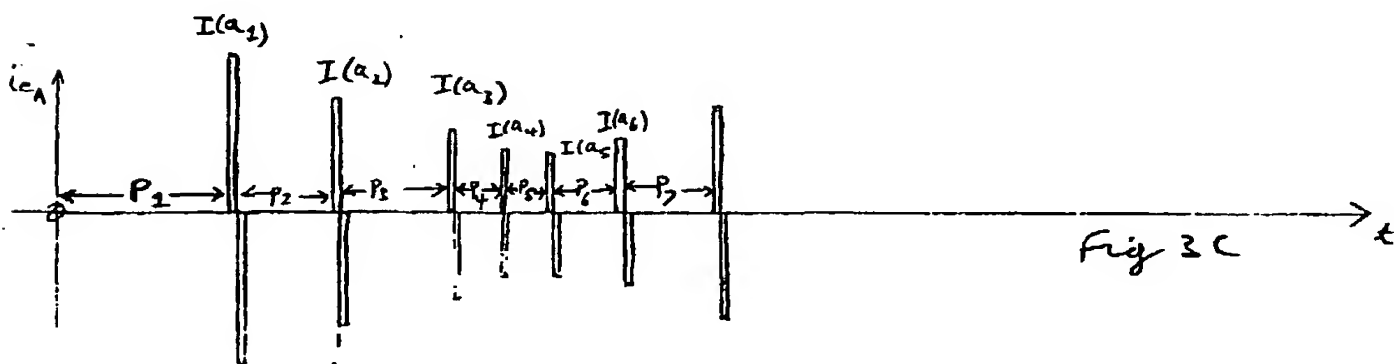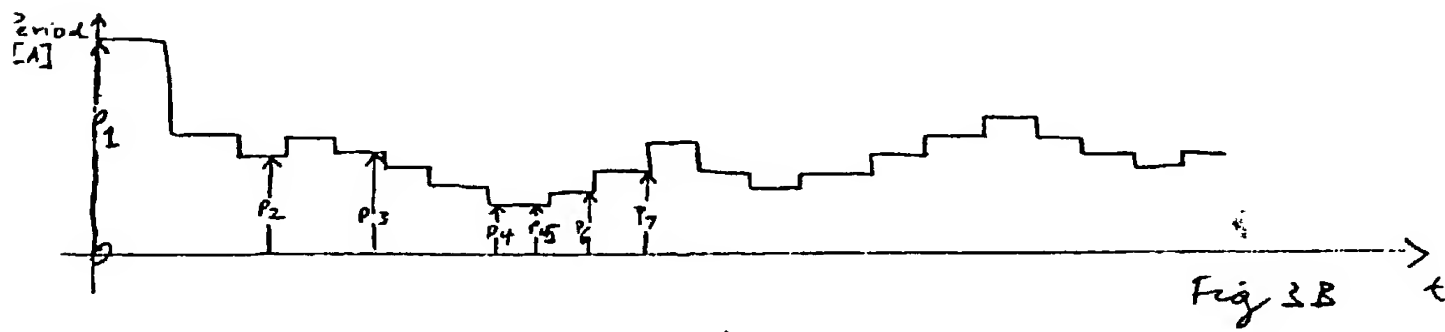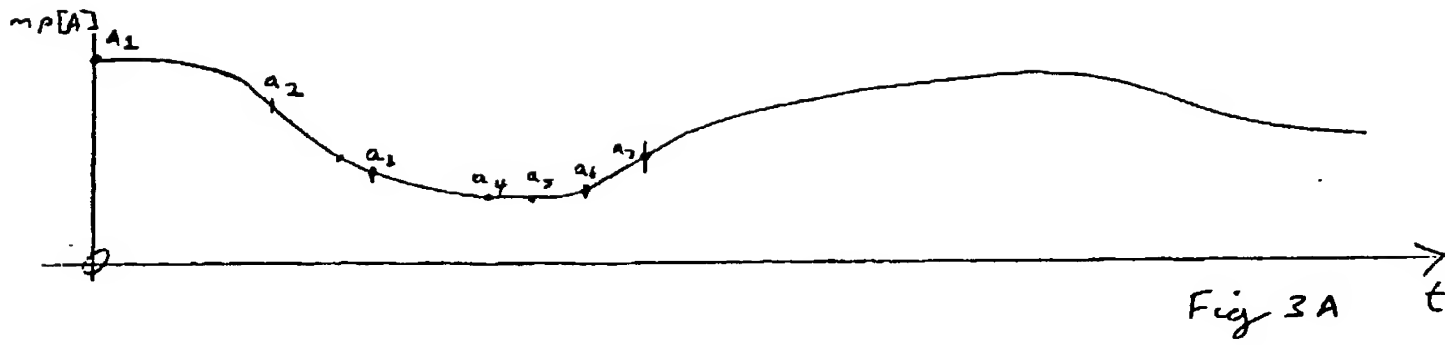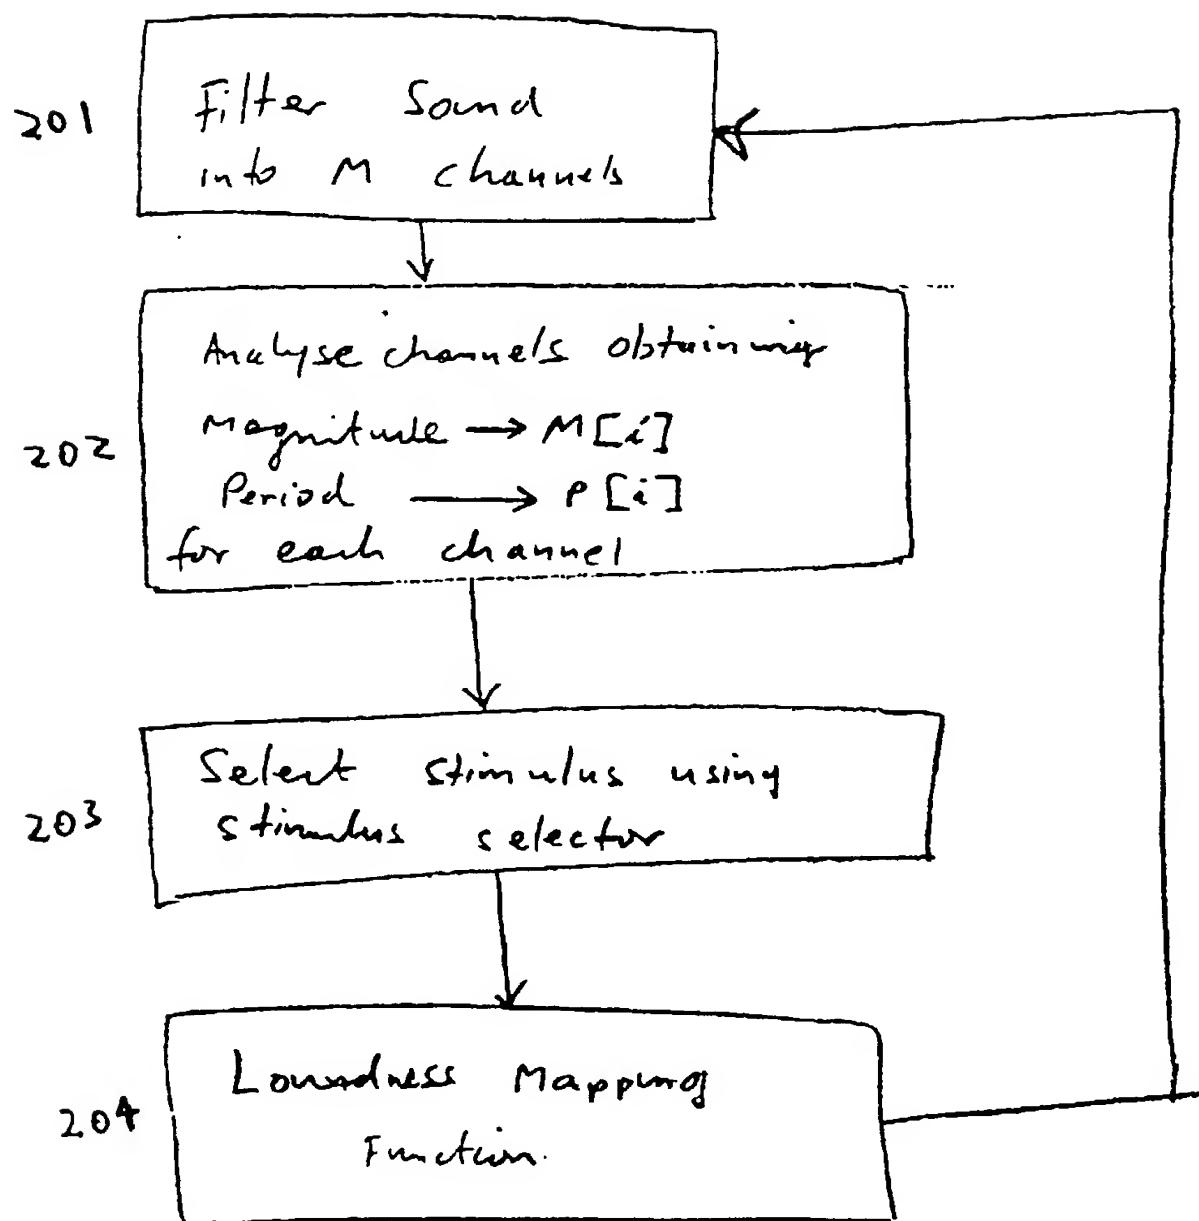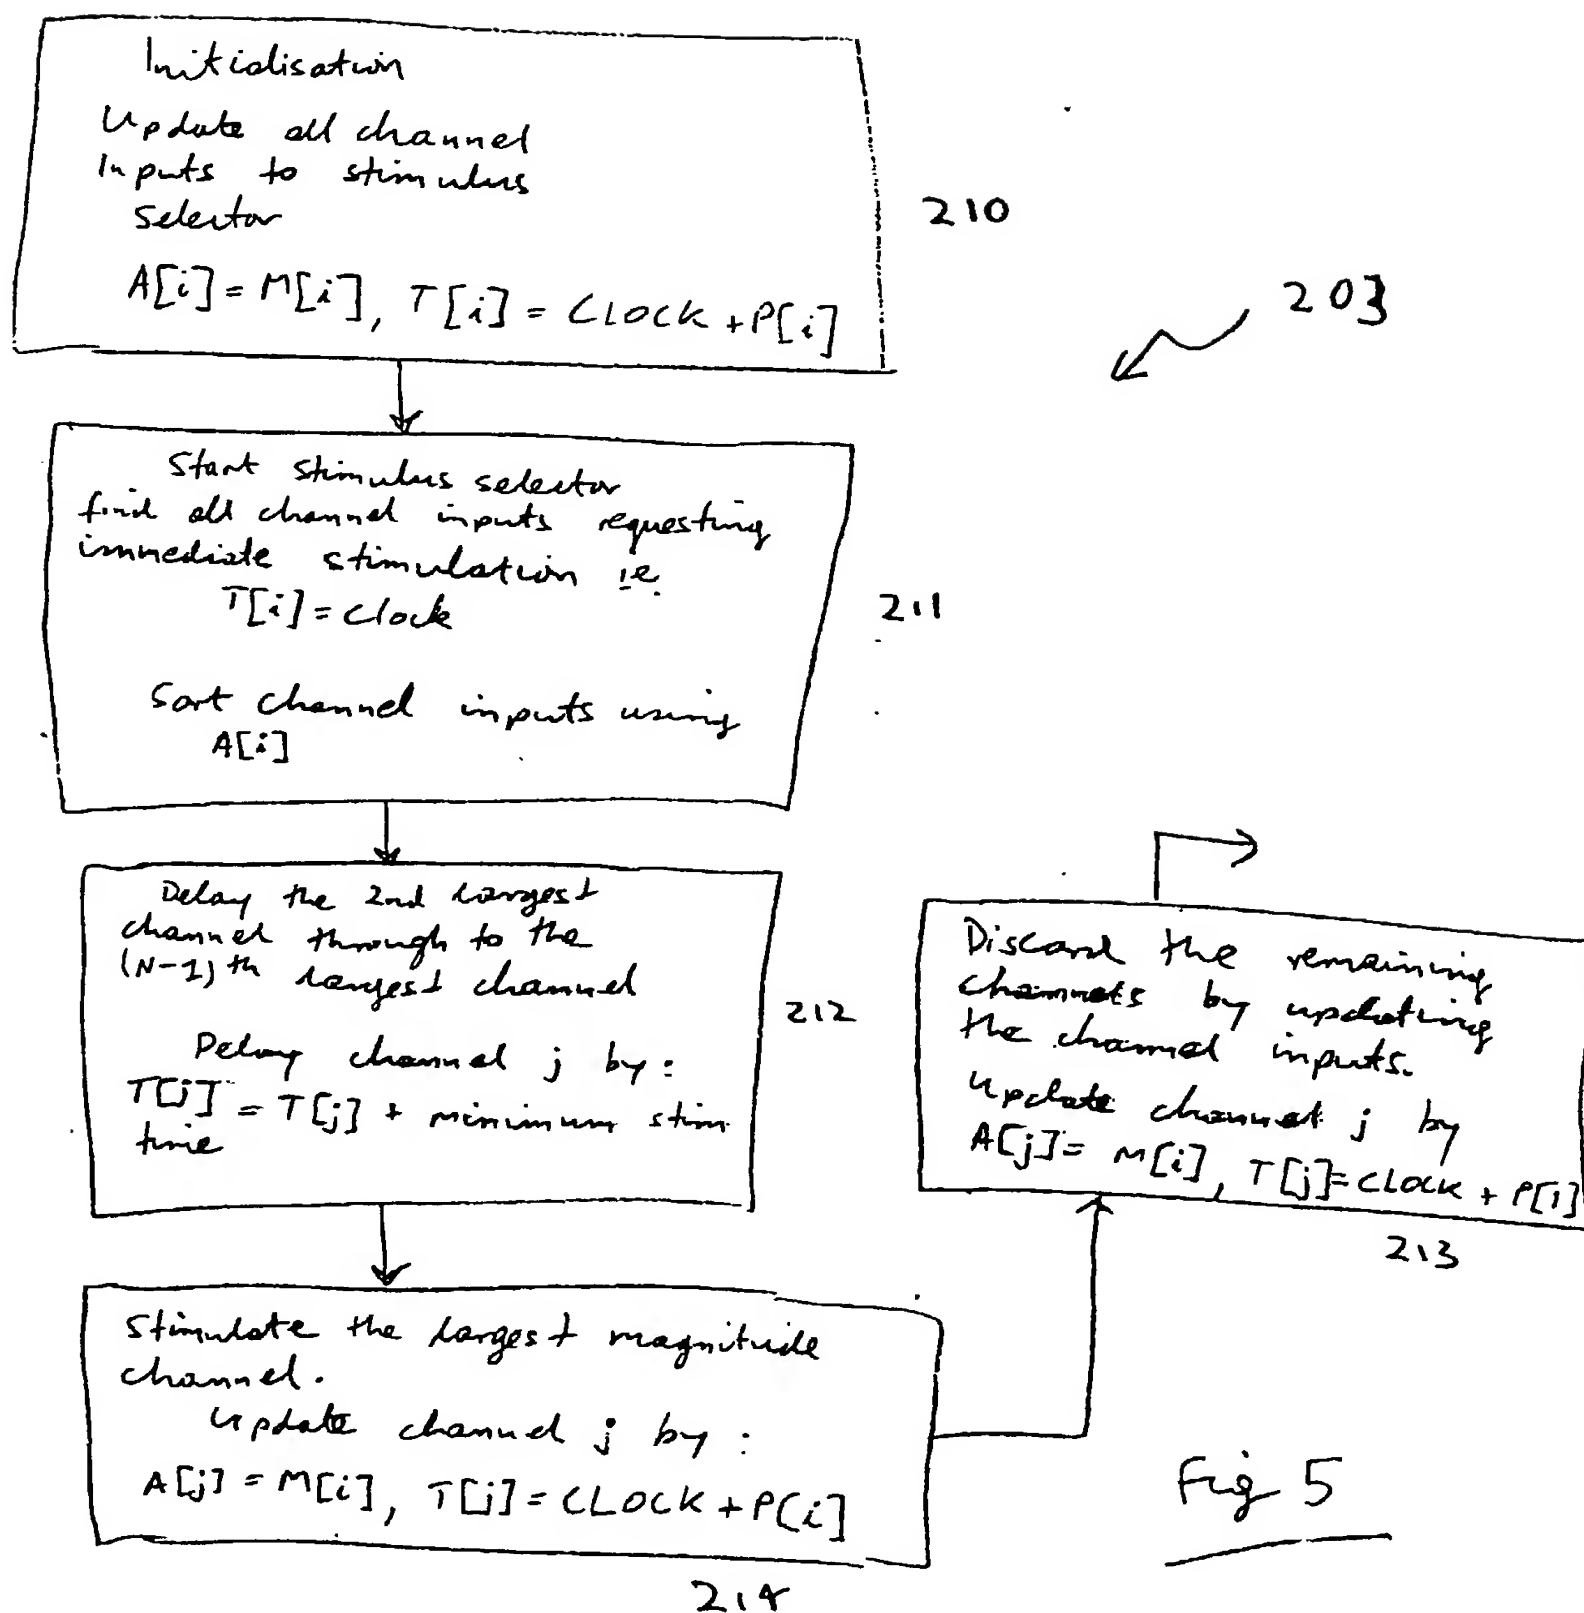

2447-014

Combined Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Multirate Cochlear Stimulation Strategy and Apparatus

the specification of which

(check one) ☐ is attached hereto. ☒ was filed on January 11, 2002 as United States Application Serial No. 10/030,830 or PCT International Application No. _____, and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, or Title 35, United States Code, §371, listed below and have also identified below, by checking the appropriate box, any foreign application for patent or inventor's certificate, or of any PCT application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority claimed	
PQ 1610	Australia	13.07.1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	Day/month/year filed	Yes	No
PCT/AU00/00838	International	13 July, 2000	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	Day/month/year filed	Yes	No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

(Application No.)	(Filing Date)
(Application No.)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application No.)	(Filing date)	(Status - patented, pending, abandoned)
		PENDING
(Application No.)	(Filing date)	(Status - patented, pending, abandoned)

2447-014

Combined Declaration and Power of Attorney

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled Multirate Cochlear Stimulation Strategy and Apparatus

the specification of which

(check one) ☐ is attached hereto. ☒ January, 11, 2002 was filed on _____ as United States Application Serial No. 10/030,830 or PCT International Application No. _____, and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, or Title 35, United States Code, §371, listed below and have also identified below, by checking the appropriate box, any foreign application for patent or inventor's certificate, or of any PCT application having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			Priority claimed	
PQ 1610	Australia	13.07.1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	Day/month/year filed	Yes	No
PCT/AU00/00838	International	13.07.1999	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	Day/month/year filed	Yes	No

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

(Application No.)	(Filing Date)
(Application No.)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

PENDING		
(Application No.)	(Filing date)	(Status - patented, pending, abandoned)
(Application No.)	(Filing date)	(Status - patented, pending, abandoned)

$$\frac{1}{\Gamma(\alpha)} \int_0^t (t-\tau)^{\alpha-1} f(\tau) d\tau = \frac{1}{\Gamma(\alpha)} \int_0^t (t-\tau)^{\alpha-1} \left(\frac{1}{\Gamma(\beta)} \int_0^\tau (\tau-s)^{\beta-1} f(s) ds \right) d\tau$$

Direct all correspondence and telephone calls to: Tiberiu WEISZ, Esq. at the address and telephone number shown above.

Full name of sole or first inventor Joe Wolfe
 Inventor's Signature Joe Wolfe Date 30 April 2002
 Residence Coogee. N.S.W. Australia
 Citizenship Australian
 Post Office Address 6/142 Beach Street, Coogee. N.S.W. 2034. Australia.

Full name of second joint inventor, if any Paul Michael Carter

Inventor's Signature _____ Date _____

Residence Aurora, Colorado, U.S.A.

Citizenship British

Post Office Address 16788 E. Prentice Cir. Aurora, Colorado 80015, U.S.A.

Full name of third joint inventor, if any Simon Geoffrey Parker

Inventor's Signature _____ Date _____

Residence Ryde, N.S.W. Australia.

Citizenship Australian

Post Office Address 8/3 Devlin Street, Ryde, N.S.W. 2112, Australia.

Full name of fourth joint inventor, if any Robert Fearn

Inventor's Signature _____ Date _____

Residence Maroubra N.S.W., Australia

Citizenship British

Post Office Address 7/170 Marine Parade, Maroubra, N.S.W. 2035, Australia

Full name of fifth joint inventor, if any Niki Frampton
 Inventor's Signature _____ Date _____
 Residence Eastwood. N.S.W. Australia
 Citizenship British
 Post Office Address 6/13 Pickford Avenue, Eastwood, N.S.W. 2122, Australia.

Full name of sixth joint inventor, if any _____
 Inventor's Signature _____ Date _____
 Residence _____
 Citizenship _____
 Post Office Address _____

And I hereby appoint George Gottlieb (Reg.No. 22,035) Jeffrey M. Kaden (Reg. No. 31,268)
Michael I. Rackman (Reg.No. 20,639) Amy B. Goldsmith (Reg. No. 33,700)
James Reisman (Reg.No. 22,007) Norbert P. Holler (Reg.No. 17,816)
Barry A. Cooper (Reg.No. 25,204) Tiberiu Weisz (Reg. No. 29,876)
David S. Kashman (Reg.No. 28,725) Maria A. Savio (Reg. No. 31,565)
Allen I. Rubenstein (Reg.No. 27,673) Raymond B. Churchill (Reg. No. 44,617)

whose address is Gottlieb, Rackman & Reisman, P.C., 270 Madison Avenue, New York NY 10016-0601
 (telephone (212) 684-3900), jointly and severally, as my attorneys and/or agents, with full power of substitution
 and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office
 connected therewith.

Direct all correspondence and telephone calls to: Tiberiu WEISZ, Esq. at the address and telephone
 number shown above.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made
 on information and belief are believed to be true; and further that these statements were made with the
 knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both,
 under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize
 the validity of the application or any patent issued thereon.

Full name of sole or first inventor Joe Wolf
 Inventor's Signature _____ Date _____
 Residence Coogee, N.S.W. Australia AUX
 Citizenship Australian
 Post Office Address 6/142 Beach Street, Coogee, N.S.W. 2034, Australia.

Full name of second joint inventor, if any Paul Michael Carter
 Inventor's Signature Paul Michael Carter Date 28 May 2002
 Residence Aurora, Colorado, U.S.A. Carlingford, NSW Australia AUX
 Citizenship British PMC 28 May 02
 Post Office Address 16788 E. Prentice Cir, Aurora, Colorado 80015, U.S.A.
9 Kerribee Pl, Carlingford NSW 2118 Australia PMC 28 May 02

Full name of third joint inventor, if any Simon Geoffrey Parker
 Inventor's Signature Simon Geoffrey Parker Date 27/5/2002
 Residence Ryde, N.S.W. Australia. AUX
 Citizenship Australian
 Post Office Address 8/3 Devlin Street, Ryde, N.S.W. 2112, Australia.

Full name of fourth joint inventor, if any Robert Fearn
 Inventor's Signature Robert Fearn Date 15/2/02
 Residence Maroubra N.S.W., Australia AUX
 Citizenship British
 Post Office Address 10/170 Marine Parade, Maroubra, N.S.W. 2035, Australia.

Full name of fifth joint inventor, if any Niki Frampton
 Inventor's Signature N Frampton Date 12.5.2002
 Residence Eastwood, N.S.W. Australia AUX
 Citizenship British Australian NF
 Post Office Address 6/13 Pickford Avenue, Eastwood, N.S.W. 2122, Australia.
52 Dover Rd Wamberal N.S.W 2260 Australia NF

Full name of sixth joint inventor, if any _____
 Inventor's Signature _____ Date _____
 Residence _____
 Citizenship _____
 Post Office Address _____